


FTXA-CW + RXA-A9 / RXA-B / RXA-B9

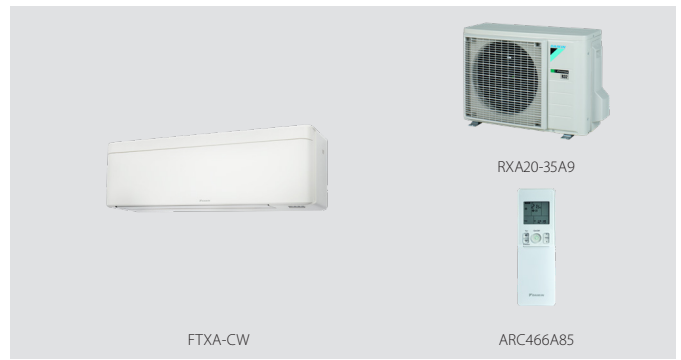

Indoor unit		FTXA		20CW	25CW	35CW	50CW	42CW		
Dimensions	Unit	HeightxWidthxDPTH		mm						
Weight	Unit			kg						
Air filter	Type			Removable / washable						
Fan	Air flow rate	Cooling	Silent operation/Low/Medium/High	m ³ /min	4.6 / 6.1 / 8.2 / 11.0	4.6 / 6.1 / 8.6 / 11.5	4.6 / 6.1 / 8.6 / 11.9	5.2 / 7.6 / 10.4 / 13.5	4.6 / 7.2 / 9.8 / 13.1	
		Heating	Silent operation / Low / Medium / High	m ³ /min	4.5 / 6.4 / 8.7 / 10.9	4.5 / 6.4 / 9.0 / 11.1	4.5 / 6.4 / 9.0 / 11.5	5.7 / 8.2 / 11.1 / 15.1	5.2 / 7.7 / 10.5 / 14.6	
Sound power level	Cooling			dBA			57		60	
Sound pressure level	Cooling	Silent operation/Low/High		dBA		19 / 25 / 39	19 / 25 / 40	19 / 25 / 41	24 / 31 / 46	21 / 29 / 45
	Heating	Silent operation/Low/High		dBA		19 / 25 / 39	19 / 25 / 40	19 / 25 / 41	24 / 33 / 46	21 / 29 / 45
Control systems	Infrared remote control				ARC466A85					
	Wired remote control				BRC073A1					

Outdoor unit		RXA		20A9	25A9	35A9	50B	42B9		
Dimensions	Unit	HeightxWidthxDPTH		mm						
Weight	Unit			kg						
Sound power level	Cooling			dBA			59.0		61.0	62.0
	Heating			dBA			59.0		61.0	62.0
Sound pressure level	Cooling	Nom.		dBA		46.0	49.0	48.0		
	Heating	Nom.		dBA		47.0	49.0	48.0		
Operation range	Cooling	Ambient	Min.~Max.	°CDB		-10 ~46				
	Heating	Ambient	Min.~Max.	°CWB		-15 ~18				
Refrigerant	Type			R-32						
	GWP			675.0			675			
	Charge			kg/TCO ₂ Eq			1.10 / 0.75			
Piping connections	Liquid	OD	mm		6.35			6.4		
	Gas	OD	mm		9.50			12.7	9.5	
	Piping length	OU - IU	Max.		m			20	30	
	Additional refrigerant charge				kg/m					
	Level difference IU - OU		Max.		m			15.0		20
Power supply	Phase/Frequency/Voltage		Hz/V		1~/50 / 220-240					
Current - 50Hz	Maximum fuse amps (MFA)		A		10			13		

Contains fluorinated greenhouse gases | See separate drawing for operation range | See separate drawing for electrical data

Efficiency data		FTXA + RXA		20CW + 20A9	25CW + 25A9	35CW + 35A9	50CW + 50B	42CW + 42B9			
Cooling capacity	Min./Nom./Max.	kW		1.30 / 2.00 / 2.60	1.30 / 2.50 / 3.20	1.40 / 3.40 / 4.00	1.70 / 5.00 / 5.30	1.70 / 4.20 / 5.00			
Heating capacity	Min./Nom./Max.	kW		1.30 / 2.50 / 3.50	1.30 / 2.80 / 4.70	1.40 / 4.00 / 5.20	1.70 / 5.80 / 6.50	1.70 / 5.40 / 6.00			
Power input	Cooling	Min./Nom./Max.		kW		0.27 / 0.43 / 0.63	0.27 / 0.56 / 0.78	0.31 / 0.78 / 1.04	-1.36 / -	-1.05 / -	
	Heating	Min./Nom./Max.		kW		0.25 / 0.50 / 0.91	0.25 / 0.56 / 1.22	0.26 / 0.99 / 1.67	-1.45 / -	-1.31 / -	
Space cooling	Energy efficiency class				A+++			A++			
	Capacity	Pdesign	kW		2.00	2.50	3.40	5.00	4.20		
	SEER			8.75	8.74	8.73	7.33	7.50			
	Annual energy consumption	kWh/a		80	100	136	239	196			
Space heating (Average climate)	Energy efficiency class				A+++			A++			
	Capacity	Pdesign	kW		2.40	2.45	2.50	4.00	3.80		
	SCOP/A			5.15			4.60				
	Annual energy consumption	kWh/a		652	666	680	1,218	1,156			
Nominal efficiency	EER			4.70			4.46		4.37	3.68	3.99
	COP			5.00			4.04		4.00	4.12	
	Annual energy consumption	kWh		213	280	389	679	526			
	Energy labeling Directive	Cooling/Heating		A/A							
Current - 50Hz	Maximum fuse amps (MFA)		A		10.00			13.00			

Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. | Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. | See separate drawing for operation range

Daikin Europe N.V. Naamloze Vennootschap · Zandvoordestraat 300 · 8400 Oostende · Belgium · www.daikin.eu · BE 0412 120 336 · BE 0412 120 336 (Responsible Editor)



Daikin Europe N.V. participates in the ECP programmes for Fan Coil Units and Variable Refrigerant Flow systems. Daikin Applied Europe S.p.A. participates in the ECP programmes for Liquid Chilling Packages and Hydronic Heat Pumps. Check ongoing validity of certificate: www.eurovent-certification.com

ECPEN24-052

09/2023



The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. / Daikin Central Europe HandelsGmbH. Daikin Europe N.V. / Daikin Central Europe HandelsGmbH have compiled the content of this publication to the best of their knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. / Daikin Central Europe HandelsGmbH explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe N.V.