


FTXA-CB + RXA-A9 / RXA-B / RXA-B9

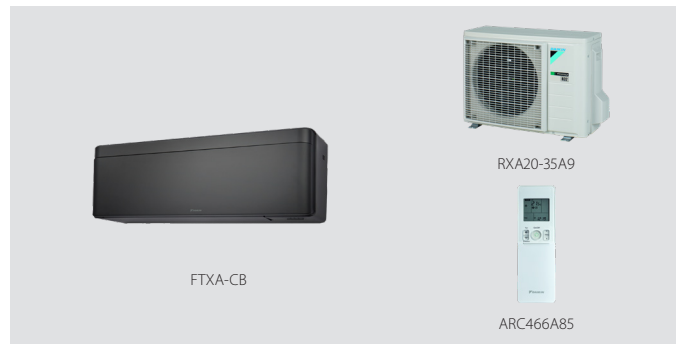

Indoor unit			FTXA	20CB	25CB	35CB	50CB	42CB	
Dimensions	Unit	HeightxWidthxDepth	mm	295 x 798 x 189					
Weight	Unit		kg	11.5					
Air filter	Type			Removable / washable					
Fan	Air flow rate	Cooling	Silent operation/ Low/Medium/ High	m ³ /min	4.6 / 6.1 / 8.2 / 11.0	4.6 / 6.1 / 8.6 / 11.5	4.6 / 6.1 / 8.6 / 11.9	5.2 / 7.6 / 10.4 / 13.5	4.6 / 7.2 / 9.8 / 13.1
		Heating	Silent operation / Low / Medium / High	m ³ /min	4.5 / 6.4 / 8.7 / 10.9	4.5 / 6.4 / 9.0 / 11.1	4.5 / 6.4 / 9.0 / 11.5	5.7 / 8.2 / 11.1 / 15.1	5.2 / 7.7 / 10.5 / 14.6
Sound power level	Cooling		dB(A)	57			60		
Sound pressure level	Cooling	Silent operation/Low/High	dB(A)	19 / 25 / 39	19 / 25 / 40	19 / 25 / 41	24 / 31 / 46	21 / 29 / 45	
	Heating	Silent operation/Low/High	dB(A)	19 / 25 / 39	19 / 25 / 40	19 / 25 / 41	24 / 33 / 46	21 / 29 / 45	
Control systems	Infrared remote control			ARC466A85					
	Wired remote control			BRC073A1					


Outdoor unit			RXA	20A9	25A9	35A9	50B	42B9
Dimensions	Unit	HeightxWidthxDepth	mm	550 x 840 x 350			734 x 954 x 401	
Weight	Unit		kg	32			49	
Sound power level	Cooling		dB(A)	59.0			62.0	
	Heating		dB(A)	59.0			62.0	
Sound pressure level	Cooling	Nom.	dB(A)	46.0			48.0	
	Heating	Nom.	dB(A)	47.0			48.0	
Operation range	Cooling	Ambient	Min.~Max.	°CDB			-10 ~ -46	
	Heating	Ambient	Min.~Max.	°CWB			-15 ~ -18	
Refrigerant	Type			R-32				
	GWP			675.0			675	
	Charge		kg/TCO ₂ Eq	0.76 / 0.52			1.10 / 0.75	
Piping connections	Liquid	OD	mm	6.35			6.4	
	Gas	OD	mm	9.50			12.7	
	Piping length	OU - IU	Max.	m			20	
	Additional refrigerant charge		kg/m	0.02 (for piping length exceeding 10m)				
	Level difference	IU - OU	Max.	m			15.0	
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50 / 220-240			20	
Current - 50Hz	Maximum fuse amps (MFA)		A	10			13	

Contains fluorinated greenhouse gases | See separate drawing for operation range | See separate drawing for electrical data

Efficiency data			FTXA + RXA	20CB + 20A9	25CB + 25A9	35CB + 35A9	50CB + 50B	42CB + 42B9
Cooling capacity	Min./Nom./Max.		kW	1.30 / 2.00 / 2.60	1.30 / 2.50 / 3.20	1.40 / 3.40 / 4.00	1.70 / 5.00 / 5.30	1.70 / 4.20 / 5.00
Heating capacity	Min./Nom./Max.		kW	1.30 / 2.50 / 3.50	1.30 / 2.80 / 4.70	1.40 / 4.00 / 5.20	1.70 / 5.80 / 6.50	1.70 / 5.40 / 6.00
Power input	Cooling	Min./Nom./Max.	kW	0.27 / 0.43 / 0.63	0.27 / 0.56 / 0.78	0.31 / 0.78 / 1.04	- / 1.36 / -	- / 1.05 / -
	Heating	Min./Nom./Max.	kW	0.25 / 0.50 / 0.91	0.25 / 0.56 / 1.22	0.26 / 0.99 / 1.67	- / 1.45 / -	- / 1.31 / -
Space cooling	Energy efficiency class			A+++			A++	
	Capacity	P _{design}	kW	2.00	2.50	3.40	5.00	4.20
	SEER			8.75	8.74	8.73	7.33	7.50
	Annual energy consumption		kWh/a	80	100	136	239	196
Space heating (Average climate)	Energy efficiency class			A+++			A++	
	Capacity	P _{design}	kW	2.40	2.45	2.50	4.00	3.80
	SCOP/A			5.15			4.60	
	Annual energy consumption		kWh/a	652	666	680	1,218	1,156
Nominal efficiency	EER			4.70			3.68	
	COP			5.00			4.04	
	Annual energy consumption		kWh	213	280	389	679	526
	Energy labeling Directive	Cooling/Heating		A/A			A/A	
Current - 50Hz	Maximum fuse amps (MFA)		A	10.00			13.00	

Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. | Nominal heating capacities are based on:

Daikin Europe N.V. Naamloze Vennootschap · Zandvoordestraat 300 · 8400 Oostende · Belgium · www.daikin.eu · BE 0412 120 336 · BE 0412 120 336 (Responsible Editor)



Daikin Europe N.V. participates in the ECP programmes for Fan Coil Units and Variable Refrigerant Flow systems. Daikin Applied Europe S.p.A. participates in the ECP programmes for Liquid Chilling Packages and Hydronic Heat Pumps. Check ongoing validity of certificate: www.eurovent-certification.com

ECPEN24-060

09/2023



The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. / Daikin Central Europe HandelsGmbH. Daikin Europe N.V. / Daikin Central Europe HandelsGmbH have compiled the content of this publication to the best of their knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. / Daikin Central Europe HandelsGmbH explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe N.V.